


# Engler Engineering Corporation

## Instructions for replacing a connector (knuckle) on the Dynax Gurney / Dynax EZ-Glider

Using the gurney diagram, circle the knuckle or knuckles that you would like to replace.

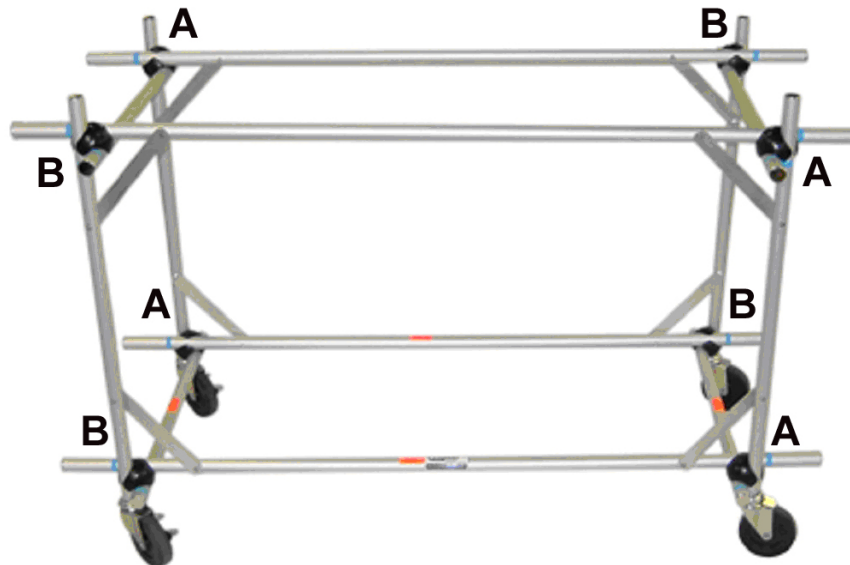

When you assemble the new knuckle on your **Dynax Gurney / EZ-Glider** take care not to over tighten it, just snug it firmly. The gurney's metal braces do all the "heavy lifting", the knuckles provide a "supporting role". If the knuckle is needed on the bottom of the gurney, it should rest on the caster, no need to over tighten.

The knuckles for the **EZ-Glider** should rest on the casters. No need to over tighten, just snug will do.

Please note: The color of the knuckles may vary.

What we need from you,

Clinic Name: \_\_\_\_\_

Clinic Phone \_\_\_\_\_

Clinic Address \_\_\_\_\_

**Fax your request back to us at 305-688-0018.**



Web: [www.englerusa.com](http://www.englerusa.com) / Email: [info@englerusa.com](mailto:info@englerusa.com)  
[www.dynaxusa.com](http://www.dynaxusa.com), [www.ez-stretcher.com](http://www.ez-stretcher.com) for brochures, manuals  
and "how to" pages please visit [www.engler411.com](http://www.engler411.com)

Engler Engineering Corporation  
1099 East 47th Street - Hialeah, Florida 33013 USA  
Tel: (800) 445-8581 / (305) 688-8581 / Fax: (305) 685-7671



Proudly made  
in the U.S.A.